



Automation Systems  
AUSTRALIA

DUKIE  
PROFESSIONAL  
XR  
Series



## Specifications

Voltage: 12-240V DC / 24-240V AC


Relay Output: NO/NC (2A)

Range: 11M Max (-40% Adverse Conditions)


IP Rating: 66

Operating Temperature: -12°C to 55°C


## Assembly Example

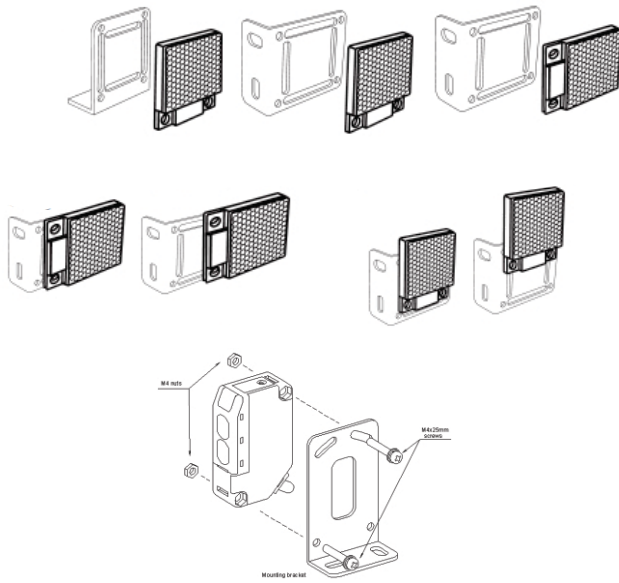


## Dimensions

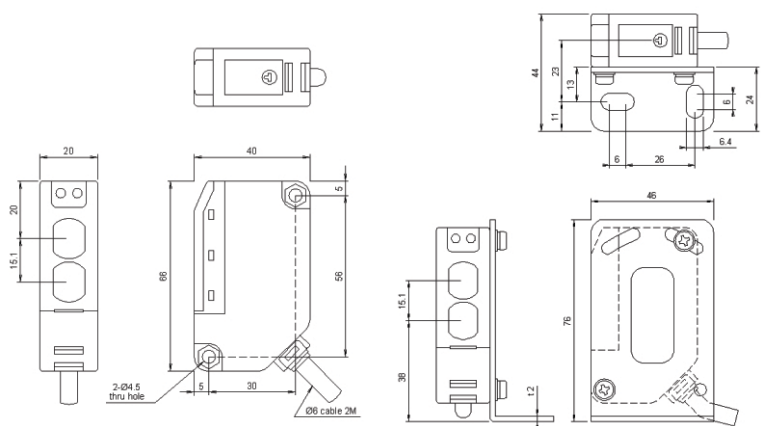


## Installation Height

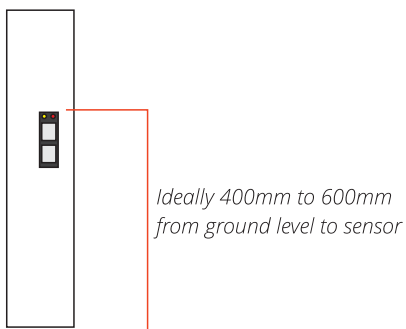


## Wiring and LED's

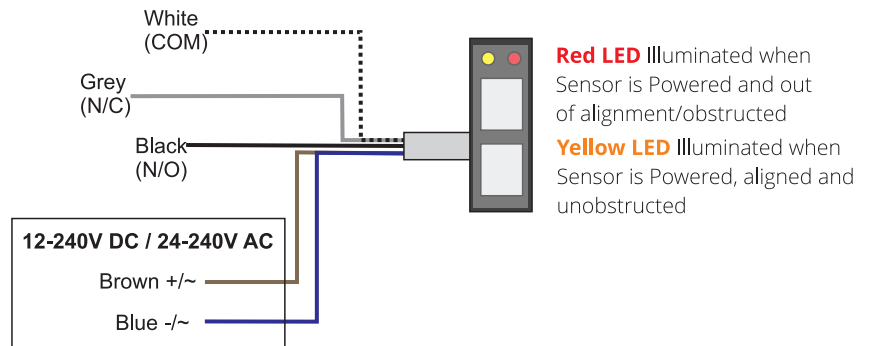


## Swing Gate Placement

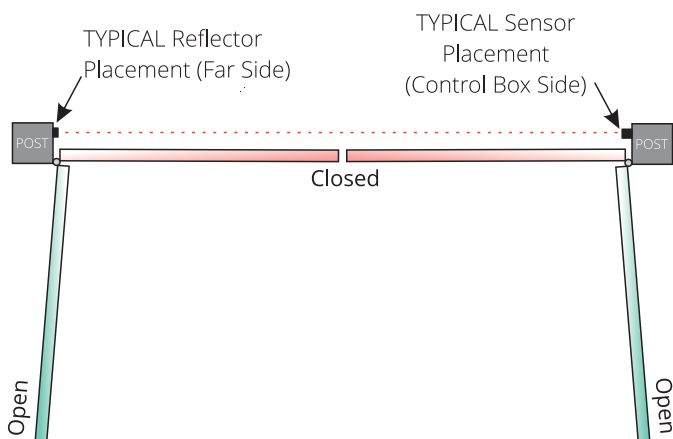


## Sliding Gate Placement

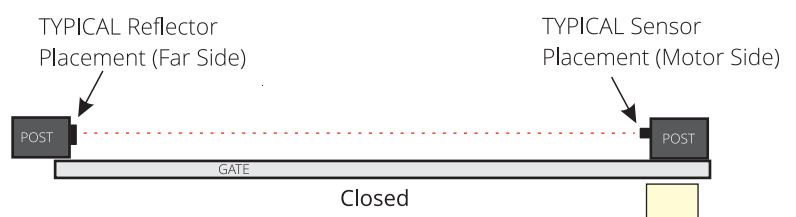

## Premier SW24 Swing Gate Control Board Connection

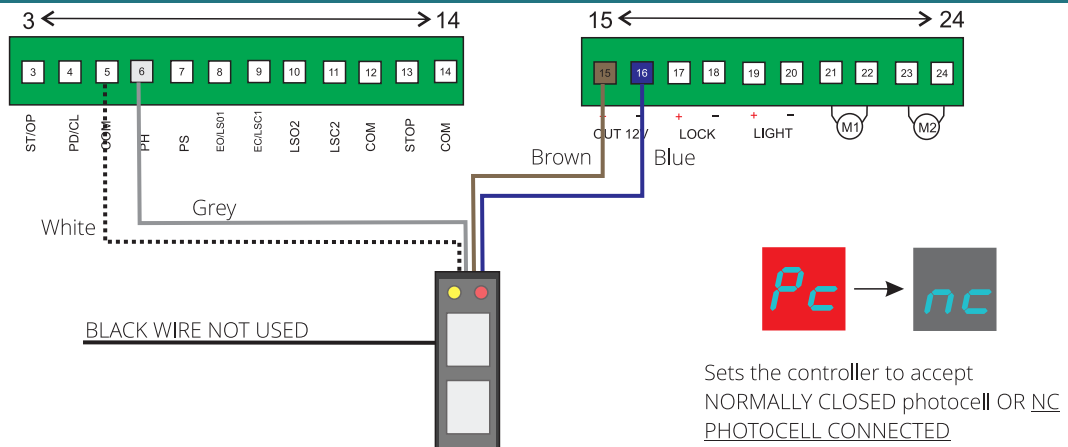

## Titan 2410 Premier SL24 Sliding Gate Control Board Connection

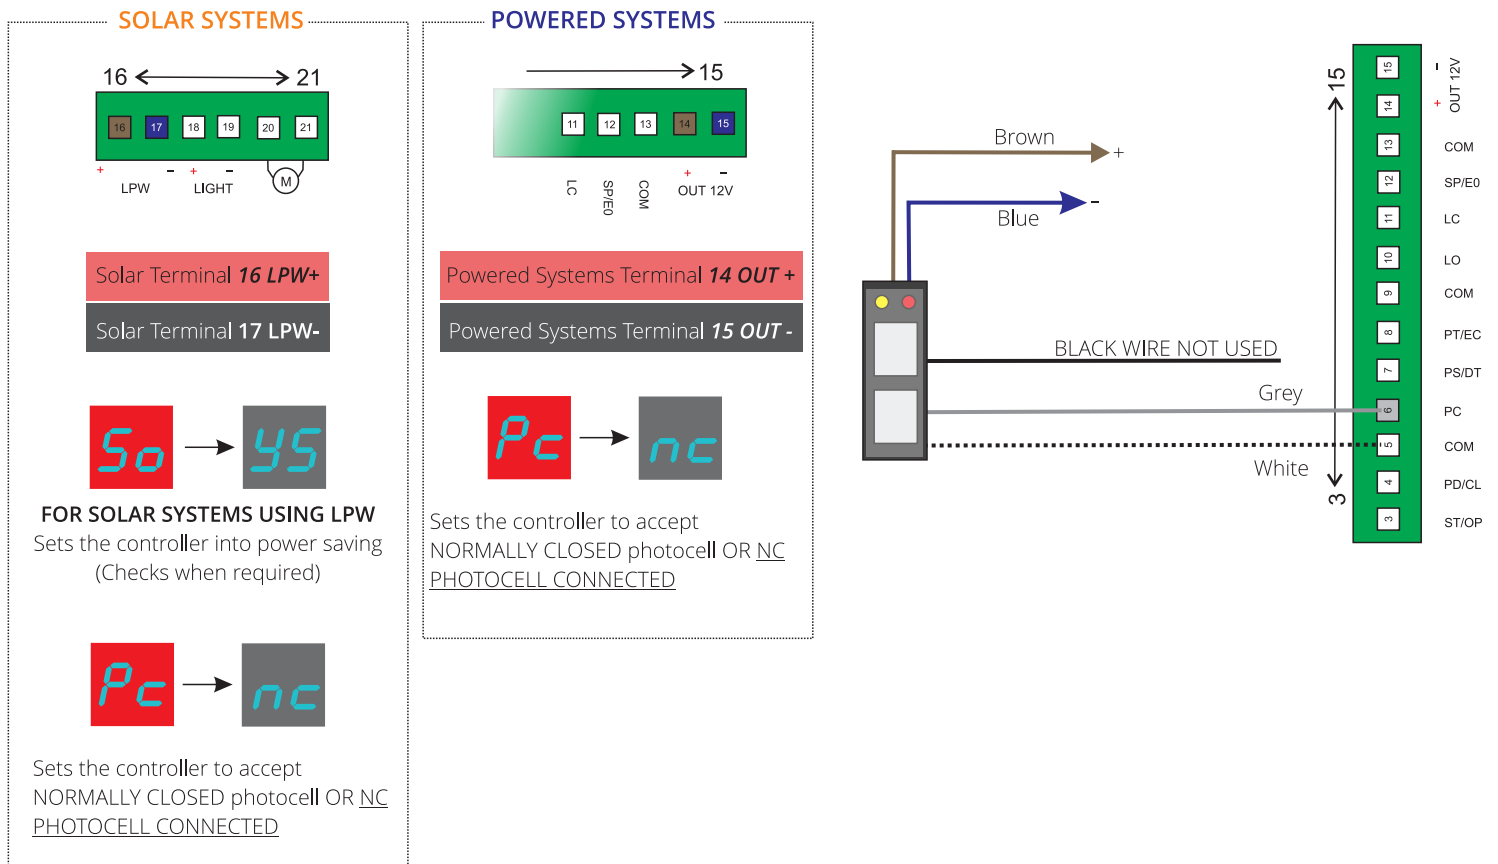

## Titan 1000 Premier SL240AC Sliding Gate Control Board Connection

